
Datenblatt

gültig ab: 21.08.24



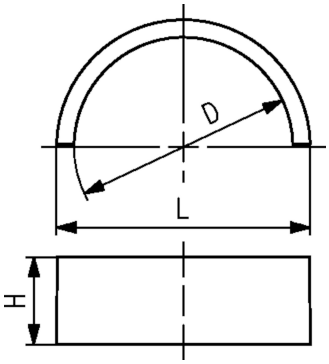

COOL-FIT 2.0F Festpunkt-Set

Ausführung:

- Vier PVC-U Halbschalen als unlösbare Verbindungen, übertragen die im Rohr auftretenden Kräfte auf den Festpunkt.
- Verwenden Sie zum Kleben Tangit RAPID, Tangit RAPID Mischer Set, Tangit RAPID Kartuschen Pistole
- Bitte beachten Sie die maximal zulässigen Kräfte für diese Ausführung in der untenstehenden Tabelle.
- **Festpunktschellen und Abspannpakete müssen bauseitig berechnet und beschafft werden. Diese sind nicht im Festpunktset von GF**

d (mm)	D (mm)	Code	NPK	Gewicht (kg)	L (mm)	H (mm)	max. Force (kN)	closest inch (inch)
32	75	**738 912 312**		0.750	87	30	2.0	1
40 - 50	90	**738 912 313**	**455 214**	0.895	105	35	3.0 / 5.0	1 ¼ / 1 ½
63	110	**738 912 314**	**455 215**	0.904	128	35	8.0	2
75	125	**738 912 315**	**455 216**	1.103	142	35	10.0	2 1/2
90	140	**738 912 316**	**455 217**	1.188	162	35	10.0	3
110	160	**738 912 317**	**455 218**	1.177	183	35	10.0	4
140	200	**738 912 319**	**455 219**	1.600	221	35	10.0	5

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/SwitzerlandPhone +41 -(0)52-631 1111e-mail: info.ps@georgfischer.comInternet: http://www.gfps.com