
Data sheet

valid from: 21/08/24



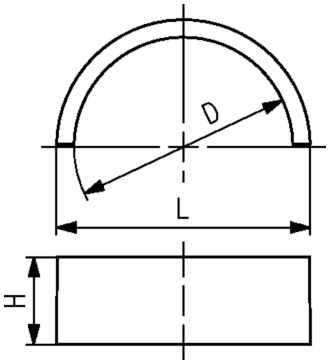

COOL-FIT 2.0F set di punti fissi

Model:

- Quattro semigusci in PVC-U come collegamento permanente per trasmettere le forze che si verificano nel tubo al punto fisso.
- Per la cementazione utilizzare Tangit RAPID, Tangit RAPID miscelatore statico Tangit RAPID e Tangit RAPID dispenser
- Verificare lo sforzo assiale massimo consentito nella tabella sottostante.
- Le staffe di fissaggio e le traverse del punto fisso devono essere calcolate dall'installatore. Le staffe non sono incluse nel kit punto fisso GF

D (mm)	d (mm)	code	NPK	weight (kg)	L (mm)	H (mm)	max. Force (kN)	closest inch (inch)
75	32	**738 912 312**		0.750	87	30	2.0	1
90	40 - 50	**738 912 313**	**455 214**	0.895	105	35	3.0 / 5.0	1 ¼ / 1 ½
110	63	**738 912 314**	**455 215**	0.904	128	35	8.0	2
125	75	**738 912 315**	**455 216**	1.103	142	35	10.0	2 1/2
140	90	**738 912 316**	**455 217**	1.188	162	35	10.0	3
160	110	**738 912 317**	**455 218**	1.177	183	35	10.0	4
200	140	**738 912 319**	**455 219**	1.600	221	35	10.0	5

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/SwitzerlandPhone +41 -(0)52-631 1111e-mail: info.ps@georgfischer.comInternet: http://www.gfps.com