Data sheet

valid from: 25/01/2025



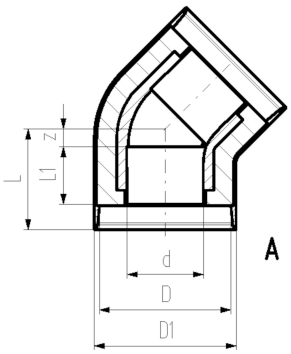

COOL-FIT 4.0 Coudes à 90°
d32-d225

Exécution:

- PE100 SDR11 pré isolé, métrique
- Isolation en mousse GF HE
- Enveloppe externe résistante au choc. Couleur: noir
- A: Raccord électrosoudable avec lèvre d'étanchéité intégrée pour un assemblage étanche à l'eau et à la vapeur

d (mm)	D (mm)	DN (mm)	SDR	PN (bar)	Code	CAN	Poids (kg)
32	90	25	11	16	**738 153 108**	**452 252**	0.108
40	110	32	11	16	**738 153 109**	**452 253**	0.162
50	110	40	11	16	**738 153 110**	**452 254**	0.218
63	125	50	11	16	**738 153 111**	**452 255**	0.315
75	140	65	11	16	**738 153 112**	**452 256**	0.650
90	160	80	11	16	**738 153 113**	**452 257**	1.030
110	180	100	11	16	**738 153 114**	**452 258**	1.270
140	225	125	11	16	**738 153 116**	**452 259**	2.958
160	250	150	11	16	**738 153 117**	**452 261**	4.100
225	315	200	11	16	**738 153 120**	**452 262**	17.603

d (mm)	D1 (mm)	L (mm)	L1 (mm)	z (mm)	closest inch (inch)	Type
32	97	72	36	11	1	A
40	117	76	40	11	1.25	A
50	117	82	44	13	1.5	A
63	132	89	48	16	2	A
75	147	98	55	18	2.5	A
90	168	117	62	30	3	A
110	188	138	72	41	4	A
140	233	157	84	48	5	A
160	258	161	90	46	6	A
225	324	278	110	143	8	A

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/SwitzerlandPhone +41 -(0)52-631 1111e-mail: info.ps@georgfischer.comInternet: http://www.gfps.com