# Data sheet

valid from: 25/01/25



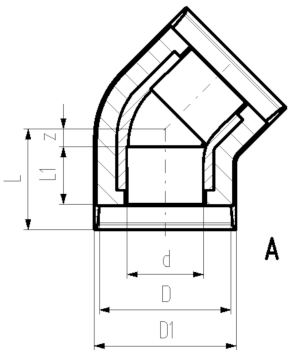


## COOL-FIT 4.0 Gomito 45°, d32-d225

**Model:**

- PE100 pre-isolato SDR 11 metrico; tubo centrale con una striscia blu
- Isolamento in schiuma GF HE
- Camicia esterna resistente agli urti. Colore: nero
- A: Raccordo per elettrofusione con guarnizione a labbro integrata, a prova di umidità e resistente alla condensa

| d (mm) | D (mm) | DN (mm) | SDR | PN (bar) | code | NPK | weight (kg) |
|---|---|---|---|---|---|---|---|
| 32 | 90 | 25 | 11 | 16 | **738 153 108** | **452 252** | 0.108 |
| 40 | 110 | 32 | 11 | 16 | **738 153 109** | **452 253** | 0.162 |
| 50 | 110 | 40 | 11 | 16 | **738 153 110** | **452 254** | 0.218 |
| 63 | 125 | 50 | 11 | 16 | **738 153 111** | **452 255** | 0.315 |
| 75 | 140 | 65 | 11 | 16 | **738 153 112** | **452 256** | 0.650 |
| 90 | 160 | 80 | 11 | 16 | **738 153 113** | **452 257** | 1.030 |
| 110 | 180 | 100 | 11 | 16 | **738 153 114** | **452 258** | 1.270 |
| 140 | 225 | 125 | 11 | 16 | **738 153 116** | **452 259** | 2.958 |
| 160 | 250 | 150 | 11 | 16 | **738 153 117** | **452 261** | 4.100 |
| 225 | 315 | 200 | 11 | 16 | **738 153 120** | **452 262** | 17.603 |

| d (mm) | D1 (mm) | L (mm) | L1 (mm) | z (mm) | closest inch (inch) | Type |
|---|---|---|---|---|---|---|
| 32 | 97 | 72 | 36 | 11 | 1 | A |
| 40 | 117 | 76 | 40 | 11 | 1.25 | A |
| 50 | 117 | 82 | 44 | 13 | 1.5 | A |
| 63 | 132 | 89 | 48 | 16 | 2 | A |
| 75 | 147 | 98 | 55 | 18 | 2.5 | A |
| 90 | 168 | 117 | 62 | 30 | 3 | A |
| 110 | 188 | 138 | 72 | 41 | 4 | A |
| 140 | 233 | 157 | 84 | 48 | 5 | A |
| 160 | 258 | 161 | 90 | 46 | 6 | A |
| 225 | 324 | 278 | 110 | 143 | 8 | A |

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/SwitzerlandPhone +41 -(0)52-631 1111e-mail: info.ps@georgfischer.comInternet: http://www.gfps.com