
Data sheet

valid from: 02/08/24



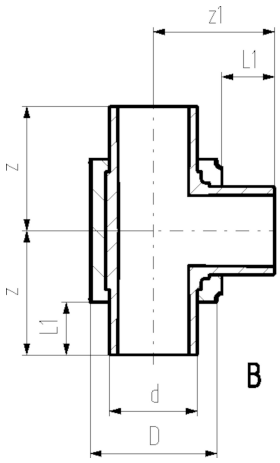

COOL-FIT 4.0 T90° uguale, d250-d450

Model:

- PE100 pre-isolato SDR 17 metrico
- Isolamento in schiuma GF HE
- Rivestimento esterno resistente agli urti. Colore: nero
- B: Raccordo a colonna con estremità libera (raccordo separato per elettrofusione necessario per l'adesione)

d (mm)	D (mm)	DN (mm)	SDR	PN (bar)	code	NPK	weight (kg)	L1 (mm)	Type	z (mm)	z1 (mm)
250	355	250	17	10	**738 203 121**		12.000	123	B	500	500
280	400	250	17	10	**738 203 122**		22.300	126	B	500	500
315	450	300	17	10	**738 203 123**		21.480	133	B	500	500
355	500	350	17	10	**738 203 124**		30.600	148	B	650	700
400	560	400	17	10	**738 203 175**		42.000	150	B	650	700
450	630	450	17	10	**738 203 176**		67.200	165	B	700	750

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail: info.ps@georgfischer.com Internet: http://www.gfps.com