Data sheet

valid from: 25/01/25



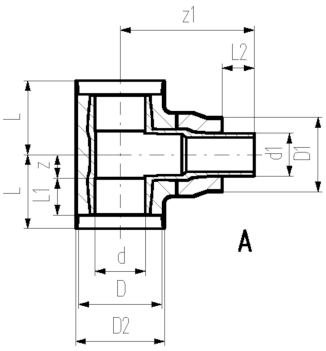

COOL-FIT 4.0 Tee 90° ridotto, d32-d225

Model:

- PE100 pre-isolato SDR 11 metrico; tubo centrale con una striscia blu
- Isolamento in schiuma GF HE
- Camicia esterna resistente agli urti. Colore: nero
- A: Raccordo per elettrofusione con guarnizione a labbro integrata, a prova di umidità e resistente alla condensa

d (mm)	d1 (mm)	D (mm)	D1 (mm)	DN (mm)	SDR	PN (bar)	code	NPK	weight (kg)
75	63	140	125	65	11	16	**738 203 218**	**452 416**	0.863
90	63	160	125	80	11	16	**738 203 222**	**452 417**	1.232
90	75	160	140	80	11	16	**738 203 223**	**452 417**	1.293
110	63	180	125	100	11	16	**738 203 227**	**452 418**	1.972
110	75	180	140	100	11	16	**738 203 228**	**452 418**	1.949
110	90	180	160	100	11	16	**738 203 229**	**452 418**	2.037
140	63	225	125	125	11	16	**738 203 240**	**452 419**	4.225
140	75	225	140	125	11	16	**738 203 241**	**452 419**	4.225
140	90	225	160	125	11	16	**738 203 242**	**452 419**	4.047
140	110	225	180	125	11	16	**738 203 243**		4.218
160	63	250	125	150	11	16	**738 203 447**	**452 421**	4.250
160	90	250	160	150	11	16	**738 203 449**	**452 421**	4.420
160	110	250	180	150	11	16	**738 203 450**	**452 421**	4.590
160	140	250	225	150	11	16	**738 203 251**	**452 421**	5.666
160	140	250	200	150	11	16	**738 204 251**	**452 421**	5.540
225	63	315	125	200	11	16	**738 203 264**	**452 422**	16.832
225	90	315	160	200	11	16	**738 203 266**	**452 422**	16.889
225	110	315	180	200	11	16	**738 203 267**	**452 422**	16.805
225	140	315	225	200	11	16	**738 203 268**	**452 422**	18.909
225	140	315	200	200	11	16	**738 204 268**	**452 422**	17.100
225	160	315	250	200	11	16	**738 203 269**	**452 422**	18.500

d (mm)	d1 (mm)	D2 (mm)	L (mm)	L1 (mm)	L2 (mm)	z (mm)	z1 (mm)	Type
75	63	147	116	55	48	36	228.0	A
90	63	168	130	62	48	43	253.0	A
90	75	168	130	62	55	43	252.0	A
110	63	188	154	72	48	57	267.0	A
110	75	188	154	72	55	57	268.0	A
110	90	188	154	72	62	57	268.0	A
140	63	233	175	84	48	66	221.0	A
140	75	233	175	84	55	66	231.0	A
140	90	233	175	84	62	66	234.0	A
140	110	233	175	84	72	66	243.0	A
160	63	258	192	90	48	77	221.0	A
160	90	258	192	90	62	77	235.0	A
160	110	258	192	90	72	77	245.0	A
160	140	258	192	90	84	77	256.1	A
160	140	258	192	90	84	77	340.0	A
225	63	324	355	110	48	220	412.0	A
225	90	324	355	110	62	220	412.0	A
225	110	324	355	110	72	220	412.0	A
225	140	324	355	110	84	220	413.0	A
225	140	324	335	110	84	220	412.0	A
225	160	324	355	110	90	220	396.0	A

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/SwitzerlandPhone +41 -(0)52-631 1111e-mail: info.ps@georgfischer.comInternet: http://www.gfps.com