

Data sheet

valid from: 25/01/25









COOL-FIT 4.0 Riduzione, d32-d225

Model:


- PE100 pre-isolato SDR 11 metrico; tubo centrale con una striscia blu
- Isolamento in schiuma GF HE
- Camicia esterna resistente agli urti. Colore: nero
- A: Raccordo per elettrofusione con guarnizione a labbro integrata, a prova di umidità e resistente alla condensa
- B: Raccordo a colonna con estremità libera (raccordo separato per elettrofusione necessario per l'adesione)
- 738 904 351 and 738 904 368 for direct transitions from COOL-FIT 4.0 to COOL-FIT 2.0

d (mm)	d1 (mm)	D (mm)	D1 (mm)	DN (mm)	SDR	PN (bar)	code	NPK	weight (kg)
40	32	110	90	32	11	16	**738 903 206**	**452 613**	0.250
50	32	110	90	40	11	16	**738 903 209**	**452 614**	0.280
50	40	110	110	40	11	16	**738 903 210**	**452 614**	0.320
63	32	125	90	50	11	16	**738 903 212**	**452 615**	0.217
63	40	125	110	50	11	16	**738 903 213**	**452 615**	0.232
63	50	125	110	50	11	16	**738 903 214**	**452 615**	0.243
75	63	140	125	65	11	16	**738 903 318**	**452 616**	0.264
90	63	160	125	80	11	16	**738 903 322**	**452 617**	0.387
90	75	160	140	80	11	16	**738 903 323**	**452 617**	0.416
110	63	180	125	100	11	16	**738 903 327**	**452 618**	0.566
110	75	180	140	100	11	16	**738 903 328**	**452 618**	0.577
110	90	180	160	100	11	16	**738 903 329**	**452 618**	0.644
140	63	225	125	125	11	16	**738 903 340**	**452 619**	1.118
140	75	225	140	125	11	16	**738 903 341**	**452 619**	1.202
140	90	225	160	125	11	16	**738 903 342**	**452 619**	1.251
140	110	225	180	125	11	16	**738 903 343**	**452 619**	1.271
160	63	250	125	150	11	16	**738 903 347**	**452 621**	1.298
160	90	250	160	150	11	16	**738 903 349**	**452 621**	1.323
160	110	250	180	150	11	16	**738 903 350**	**452 621**	1.362
160	140	250	225	150	11	16	**738 903 351**	**452 621**	1.845
160	140	250	200	150	11	16	**738 904 351**	**452 641**	1.664
225	63	315	125	200	11	16	**738 903 364**	**452 622**	2.960
225	90	315	160	200	11	16	**738 903 366**	**452 622**	3.018
225	110	315	180	200	11	16	**738 903 367**	**452 622**	3.079
225	140	315	225	200	11	16	**738 903 368**		3.443
225	140	315	200	200	11	16	**738 904 368**	**452 622**	3.172
225	160	315	250	200	11	16	**738 903 369**	**452 622**	3.550

d (mm)	d1 (mm)	D2 (mm)	L (mm)	L1 (mm)	L2 (mm)	z (mm)	Type
40	32	117	143	40	36	17	A
50	32	117	151	44	36	21	A
50	40	117	149	44	40	15	A
63	32	132	160	48	36	26	A
63	40	132	159	48	40	21	A
63	50	132	159	48	44	17	A
75	63			55	48	170	B
90	63			62	48	190	B
90	75			62	55	189	B
110	63			72	48	204	B
110	75			72	55	205	B
110	90			72	62	205	B
140	63			84	48	225	B
140	75			84	55	237	B
140	90			84	62	238	B
140	110			84	72	233	B
160	63			90	48	244	B
160	90			90	62	244	B

Data sheet

valid from: 25/01/25

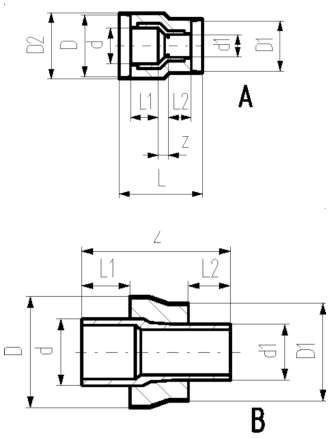

d (mm)	d1 (mm)	D2 (mm)	L (mm)	L1 (mm)	L2 (mm)	z (mm)	Type
160	110			90	72	242	B
160	140			90	84	257	B
160	140			90	84	257	B
225	63			110	48	295	B
225	90			110	62	295	B
225	110			110	72	295	B
225	140			110	84	296	B
225	140			110	84	296	B
225	160			110	90	279	B

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/SwitzerlandPhone +41 -(0)52-631 1111e-mail: info.ps@georgfischer.comInternet: http://www.gfps.com