


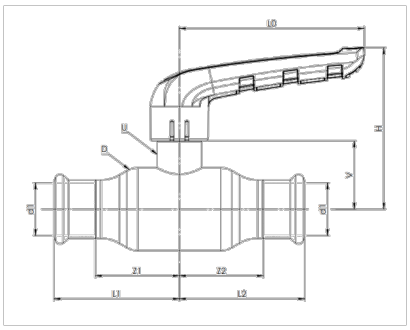

VSH XPress Stainless ball valve (press)

XPR20100

XPress

Approvals

Assortment

Art. No	Size	Item weight	l x w x h	Packaging	GTIN
2010000100	15 (DN10)	0.17 kg	122x77x26	Bag (1 pce)	05708537597011
2015000100	18 (DN15)	0.22 kg	127x81x30	Bag (1 pce)	05708537597073
2020000100	22 (DN20)	0.22 kg	134x88x38	Bag (1 pce)	05708537597134
2025000100	28 (DN25)	0.56 kg	168x110x45	Bag (1 pce)	05708537597196
2032000100	35 (DN32)	0.86 kg	180x122x57	Bag (1 pce)	05708537597257
2040000100	42 (DN40)	1.40 kg	219x140x68	Bag (1 pce)	05708537597318
2050000100	54 (DN50)	2.33 kg	233x157x85	Bag (1 pce)	05708537597370

Dimensions

Art. No	Size	L0	l1	d1	D1	z1	l2	d2	D2	z2
2010000100	15 (DN10)	75	47	15.3 (DN10)	23	27	47	15.3 (DN10)	23	27
2015000100	18 (DN15)	75	51.5	18.3 (DN15)	27	32	51.5	18.3 (DN15)	27	32
2020000100	22 (DN20)	75	60.5	22.3 (DN20)	32	40	60.5	22.3 (DN20)	32	40
2025000100	28 (DN25)	100	67.5	28.3 (DN25)	38	45	67.5	28.3 (DN25)	38	45
2032000100	35 (DN32)	100	80.5	35.3 (DN32)	45	55	80.5	35.3 (DN32)	45	55
2040000100	42 (DN40)	119	99	42.4 (DN40)	54	69	99	42.4 (DN40)	54	69
2050000100	54 (DN50)	119	113	54.4 (DN50)	65	79	113	54.4 (DN50)	65	79

Characteristics

Colors	Silver
Materials	Stainless steel (Stainless steel 316L (1.4404))
Manufacturer	Broen
Shape	Straight
Connection type	Press (M)

Technical specifications

Max. operating pressure	16 bar (liquid)
Min. temperature	-35ºC
Max. temperature	135ºC

General

Category	Valves
ETIM class	EC011343 Ball valve
Intrastat code	84818081