


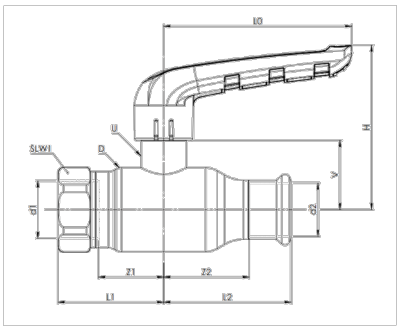

VSH XPress Stainless ball valve (press x thread)

XPR21000

XPress

Approvals

Assortment

Art. No	Size	Item weight	l x w x h	Packaging	GTIN
2010001010	15xG1/2 (DN10)	0.20 kg	121x79x30	Bag (1 pce)	05708537597035
2015001010	18xG3/4 (DN15)	0.26 kg	126x84x32	Bag (1 pce)	05708537597097
2020001000	22xG3/4 (DN20)	0.31 kg	127x89x40	Bag (1 pce)	05708537597158
2025001000	28xG1 (DN25)	0.62 kg	156x110x41	Bag (1 pce)	05708537597219
2032001000	35xG1 1/4 (DN32)	0.98 kg	170x122x57	Bag (1 pce)	05708537597271
2040001000	42xG1 1/2 (DN40)	1.53 kg	198x140x68	Bag (1 pce)	05708537597332
2050001000	54xG2 (DN50)	2.63 kg	216x157x85	Bag (1 pce)	05708537597394

Dimensions

Art. No	Size	L0	l1	d1	D1	z1	l2	d2	z2
2010001010	15xG1/2 (DN10)	75	47	15.3 (DN10)	23	27	38	21.3 (1/2" (DN15))	27
2015001010	18xG3/4 (DN15)	75	51.5	18.3 (DN15)	27	32	43	26.9 (3/4" (DN20))	32
2020001000	22xG3/4 (DN20)	75	60.5	22.3 (DN20)	32	40	52	26.9 (3/4" (DN20))	36
2025001000	28xG1 (DN25)	100	67.5	28.3 (DN25)	38	45	56	33.7 (1" (DN25))	37
2032001000	35xG1 1/4 (DN32)	100	80.5	35.3 (DN32)	45	55	67	42.4 (1 1/4" (DN32))	46
2040001000	42xG1 1/2 (DN40)	119	99	42.4 (DN40)	54	69	78	48.3 (1 1/2" (DN40))	57
2050001000	54xG2 (DN50)	119	113	54.4 (DN50)	65	79	96	60.3 (2" (DN50))	69

Characteristics

Colors	Silver
Materials	Stainless steel (Stainless steel 316L (1.4404))
Manufacturer	Broen
Shape	Straight
Connection type	Press (M), G - female thread gas cylindrical (BSPP)

Technical specifications

Max. operating pressure	16 bar (liquid)
Min. temperature	-35ºC
Max. temperature	135ºC

General

Category	Valves
ETIM class	EC011343 Ball valve
Intrastat code	84818081