


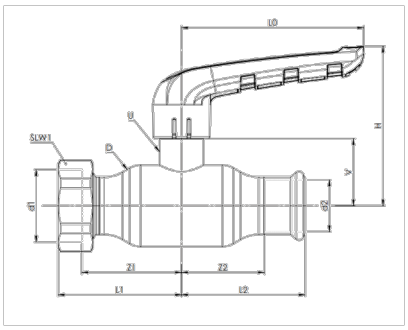

VSH XPress Stainless ball valve (press x nut)

XPR21400

XPress

Approvals

Assortment

Art. No	Size	Item weight	l x w x h	Packaging	GTIN
2010001410	15xG3/4 (DN10)	0.23 kg	127x82x32	Bag (1 pce)	05708537597059
2015001400	18xG3/4 (DN15)	0.27 kg	133x84x32	Bag (1 pce)	05708537597110
2020001410	22xG3/4 (DN20)	0.28 kg	145x88x38	Bag (1 pce)	05708537597172
2025001400	28xG1 1/4 (DN25)	0.65 kg	174x114x46	Bag (1 pce)	05708537597233
2032001400	35xG1 1/2 (DN32)	0.97 kg	183x122x57	Bag (1 pce)	05708537597295
2040001400	42xG1 3/4 (DN40)	1.51 kg	216x140x68	Bag (1 pce)	05708537597356
2050001400	54xG2 1/4 (DN50)	2.57 kg	231x157x85	Bag (1 pce)	05708537597417

Dimensions

Art. No	Size	L0	l1	d1	D1	z1	l2	d2	z2
2010001410	15xG3/4 (DN10)	75	47	15.3 (DN10)	23	28	47	26.9 (3/4" (DN20))	38
2015001400	18xG3/4 (DN15)	75	51.5	18.3 (DN15)	27	32	53.4	26.9 (3/4" (DN20))	44
2020001410	22xG3/4 (DN20)	75	60.5	22.3 (DN20)	32	41	71.5	26.9 (3/4" (DN20))	62
2025001400	28xG1 1/4 (DN25)	100	67.5	28.3 (DN25)	38	46	67.4	26.9 (1 1/4" (DN32))	55
2032001400	35xG1 1/2 (DN32)	100	80.5	35.3 (DN32)	45	56	79.4	26.9 (1 1/2" (DN40))	67
2040001400	42xG1 3/4 (DN40)	119	99	42.4 (DN40)	54	70	92.4	26.9	81
2050001400	54xG2 1/4 (DN50)	119	113	54.4 (DN50)	65	79	106.2	26.9	93

Characteristics

Colors	Silver
Materials	Stainless steel (Stainless steel 316L (1.4404))
Manufacturer	Broen
Shape	Straight
Connection type	Press (M), G - female thread gas cylindrical (BSPP)

Technical specifications

Max. operating pressure	16 bar (liquid)
Min. temperature	-35ºC
Max. temperature	135ºC

General

Category	Valves
ETIM class	EC011343 Ball valve
Intrastat code	84818081