


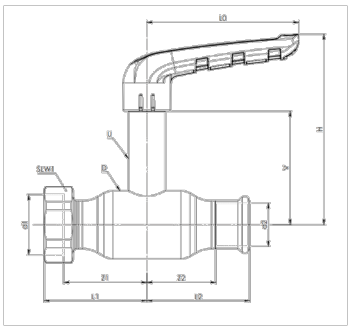

VSH XPress Stainless ball valve high (press x nut)

XPR21401

XPress

Approvals

Assortment

Art. No	Size	Item weight	l x w x h	Packaging	GTIN
2010001411	15xG3/4 (DN10)	0.31 kg	127x124x32	Bag (1 pce)	05708537597066
2015001401	18xG3/4 (DN15)	0.35 kg	133x126x32	Bag (1 pce)	05708537597127
2020001411	22xG3/4 (DN20)	0.37 kg	145x130x38	Bag (1 pce)	05708537597189
2025001401	28xG1 1/4 (DN25)	0.78 kg	174x151x46	Bag (1 pce)	05708537597240
2032001401	35xG1 1/2 (DN32)	1.11 kg	183x159x57	Bag (1 pce)	05708537597301
2040001401	42xG1 3/4 (DN40)	1.74 kg	216x190x68	Bag (1 pce)	05708537597363
2050001401	54xG2 1/4 (DN50)	2.79 kg	231x208x85	Bag (1 pce)	05708537597424

Dimensions

Art. No	Size	L0	l1	d1	D1	z1	l2	d2	z2
2010001411	15xG3/4 (DN10)	75	47	15.3 (DN10)	23	28	59.4	26.9 (3/4" (DN20))	49
2015001401	18xG3/4 (DN15)	75	51.5	18.3 (DN15)	27	32	53.4	26.9 (3/4" (DN20))	44
2020001411	22xG3/4 (DN20)	75	60.5	22.3 (DN20)	32	41	71.5	26.9 (3/4" (DN20))	62
2025001401	28xG1 1/4 (DN25)	100	67.5	28.3 (DN25)	38	46	67.4	1 1/4" (DN32)	55
2032001401	35xG1 1/2 (DN32)	100	80.5	35.3 (DN32)	45	56	79.4	1 1/2" (DN40)	67
2040001401	42xG1 3/4 (DN40)	119	99	42.4 (DN40)	54	70	92.4		81
2050001401	54xG2 1/4 (DN50)	119	113	54.4 (DN50)	65	79	106.2		93

Characteristics

Colors	Silver
Materials	Stainless steel (Stainless steel 316L (1.4404))
Manufacturer	Broen
Shape	Straight
Connection type	Press (M), G - female thread gas cylindrical (BSPP)

Technical specifications

Max. operating pressure	16 bar (liquid)
Min. temperature	-35ºC
Max. temperature	135ºC

General

Category	Valves
ETIM class	EC011343 Ball valve
Intrastat code	84818081